




Link to your ideal
space.
SPC 2022



LINK LOCK
Revolution in tiles

201 X 1220 MM
181 X 1220 MM
306 X 612 MM

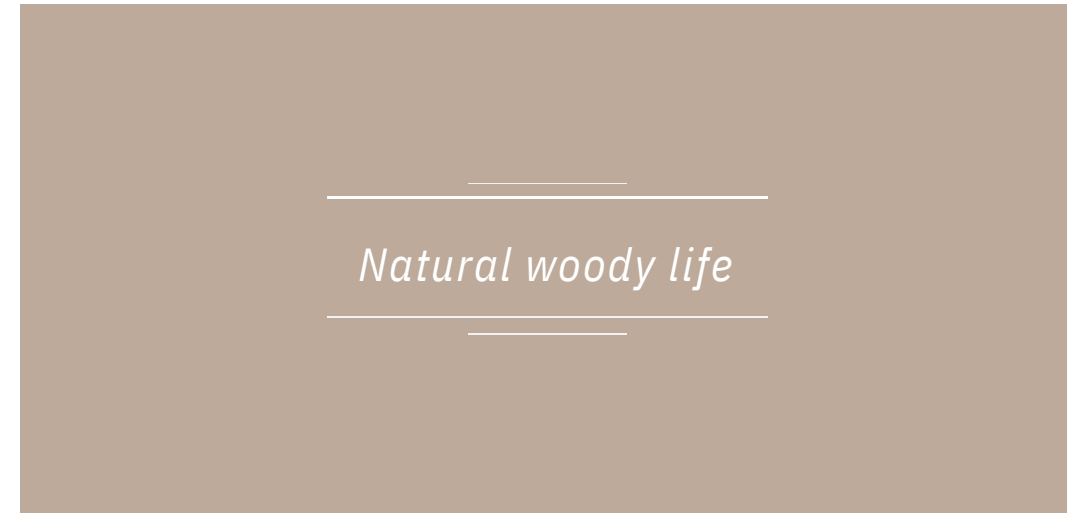

Ideal for every space as it keeps the floor germ-free.



Link to your ideal space.



SPC material that simulates natural stone, marble, or natural wood, Ideal for residential and public spaces.

Eco-friendly, resistant and long-lasting flooring.

LINK n LOCK

WHY LINK LOCK?

"Link Lock" flooring is specially designed technology with inter locking seamless joints system. It can easily be installed with designed pattented technology from **UNILIN**, on different floor base. Cleaned floor can be concrete, ceramic or other existing flooring.

Laying of "Link Lock" is made precise and simple, Moreover Link n Lock is an innovation to become more dynamic and versatile than ever. These enviro- friendly tiles are noise proof, dust free and also scratch and stain resistant. As also being water proof and anti-slip they are perfect selection for kitchen and bathroom. "Link n Lock" is designed as identical appeal of traditional flooring materials such as Stone, Wood, Concrete, Fabric. It provides flexibility prints offering a wide variety of design concepts.




“LINK LOCK” - SPC flooring,
what does it stands for ?

SPC flooring stands for **Stone Plastic Composite**. It describes the ultra-tough core of luxury SPC flooring. Popular for being 100% waterproof with extreme durability, these engineered luxury SPC planks with a cutng edge design, mimic natural wood and stone textures at minimal effort. LINKLOCK - SPC's base is virtually imperishable, making it an absolute choice for high-traffic and commercial environments.

EASE CLEAN
Appreciate the cleanliness

“LINKLOCK” THE MOST DURABLE

SPC FLOORING
A must information for Architects, Builder supervisors and Customers.
Discovering the SPC SURFACE.
“LINK LOCK is one of the most popular materials for interior renovations,
as its installation does not require any construction work.”

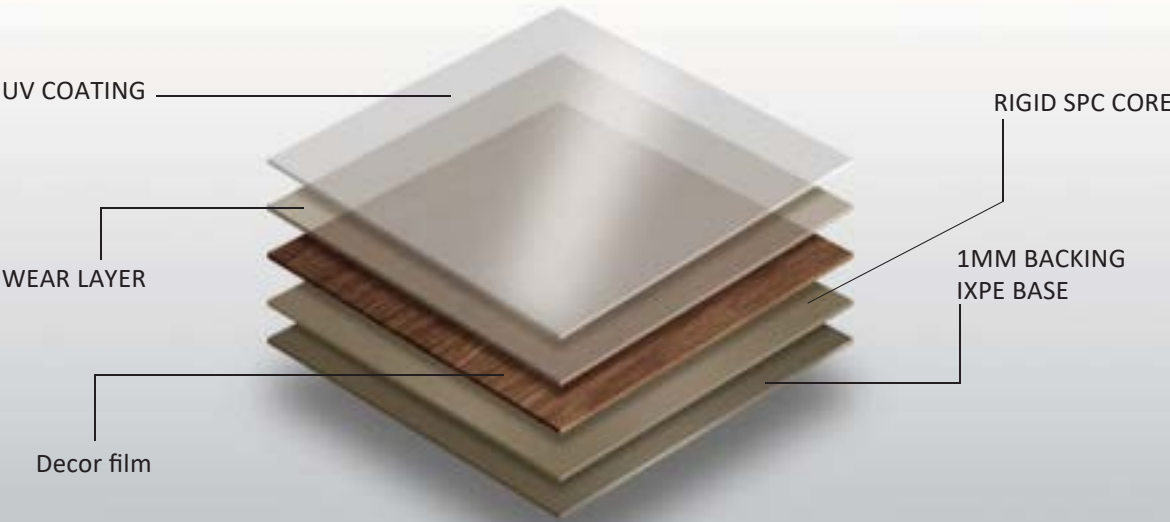


SPC flooring,
what is the role of SPC in flooring actually ?

Link n Lock SPC flooring, is the most durable waterproof flooring in the market. SPC flooring is crowd-pleasing for being flexible and less bulky than traditonal wood, well its just like standing on real solid marterial. It is thinnest flooring, may seem like it doesn't inside to it, but it is the toughest of the tough, specially designed to resist the use of commercial outskirts.

- Quick Installation
- Lower Weight
- Easy To Clean
- Green Product
- Flame Resistant
- Scratch Resistant
- Weather Proof
- Stain free
- Peresit free
- Water Proof
- Recyclable
- Hassle Free Logistics
- Easy to Carry
- Mix & Match



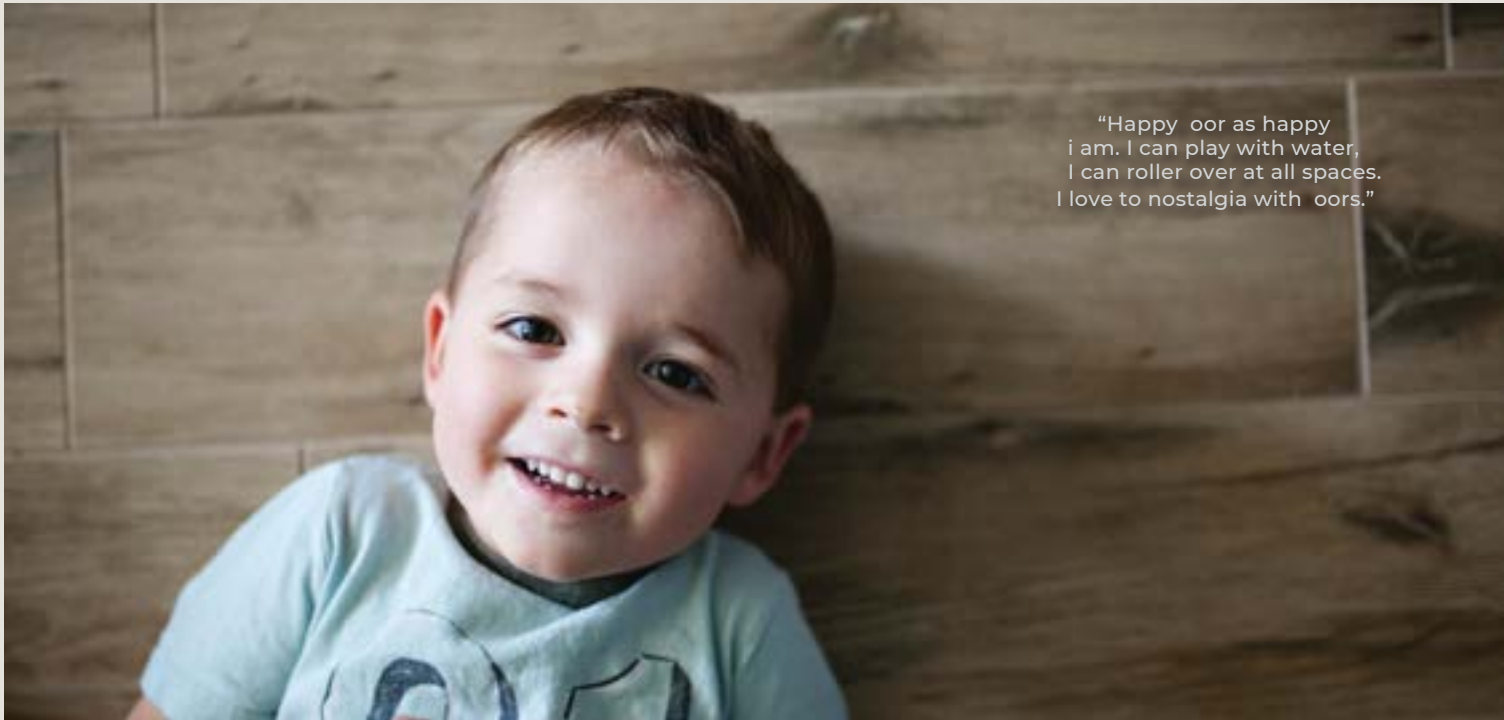

"Happy floor as happy
i am. I can play with water,
I can roller over at all spaces.
I love to nostalgia with floors."


KEY FEATURES:



Realistic wood and stone looks
For Commercial & high-traffic areas
For Bathroom, Kitchen, Basements.
It provides flexibility prints
offering a wide variety
of design concepts.



No expansion /contraction
same feel from the day one.
~~One big worry for traditional wood~~
flooring is expansion and contraction
causing shifting or buckling in the
floor. Rigid core does not expand
or contract,even when
moisture is present.



Perfect for imperfect subfloors
thanks to technology integrated
into the product

This is the other trademark
of LINK LOCK SPC vinyl flooring.
Engineered to be installed over
any existing hard
surface, including tile.



Ultra-durable
Zero maintenance

LINK LOCK SPC vinyl flooring is the
toughest, most durable vinyl flooring
option on the market. All you need
is the occasional vacuum and damp
mop to keep your floor
looking fabulous.



Restaurants, canteens, cafes.
Greater hygiene in food space
is essential.



Healthcare environments, medical clinics.
Sensitive immune system requires the
utmost care.



Gyms, health clubs, spas.
Anti-microbial surfaces in sports and
wellness centres for extreme care.



Airports, shopping centres, schools.
Large public areas are difficult to clean,
keeping it germs free and smell free.



The unique features of
SPC flooring



Less than 24
hours installation
in a day



Highly Durable




Hasselfree
Installation



Noise and
Dust free




Healthy
Floor




We know pets can completely wreck a
floor between accidents, nails and
running, SPC is built to handle it. It's
also less slippery on those little puppy
paw.



Completely fire resistance, Not only
is it non-combustible; it also acts as a
barrier in the event of a fire.



SPC vinyl floor can withstand the
exposure to sunlight, with its
original colour and shade remaining
unaltered.



It has non-slip properties, combin-
ing a natural feel with high-level
resistance against slipping.




It's perfect for business owners,
pets and water-prone areas.
Moisture proof with Zero surface
porosity.




High resistance to regular cleaning
product. Completely stain
resistance.

FORMATS
SIZES AND COLORS
available.


201 X 1220
MM

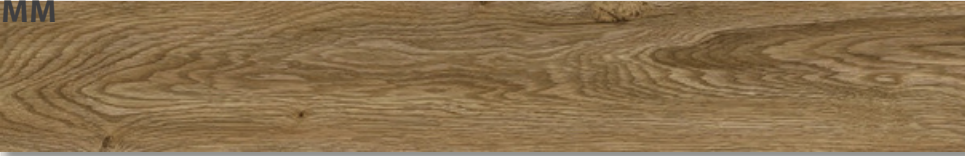

181 X 1220
MM

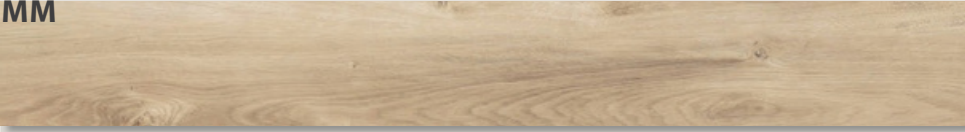

White Ebony Honey Ash Golden Wenge

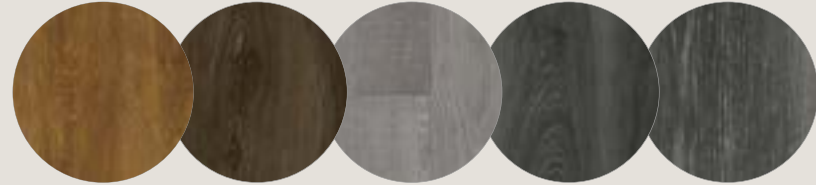

Brown Coco Grey Carbon Black

306 X 612
MM



306 X 612
MM



306 X 612
MM



“LINKLOCK” TEXTURE LUXURY

STONE | MARBLE | WOOD.
Natural material looks are usually incredibly convincing and beautiful. The many inspirations behind the LINK LOCK range can be used to customise any space and create constantly changing material effects.

STONE
As nature creates. The stone reveals its true essence. The rigour of stone is transformed through creative research into surface processing techniques. App: INDOOR.



WOOD
Wood effect focus on elegance and natural look. The soft veins, the harder once and natural stencils of wood are designed to ensure the maximum versatility. This expands the range of application and sizes that include the exclusive SPC planks. App: INDOOR.

MARBLE
Exotic Marble that stand out for their sophisticated colors, elegant veins effect and highly decorative surfaces. App: INDOOR.



APPLICATION

Indoor application where SPC flooring can be placed:

Residential:
Living room |
bedroom:


Commercial:

Retail Shops | Restaurant |
Cafes:

Finishes:



Rustic |
Matt

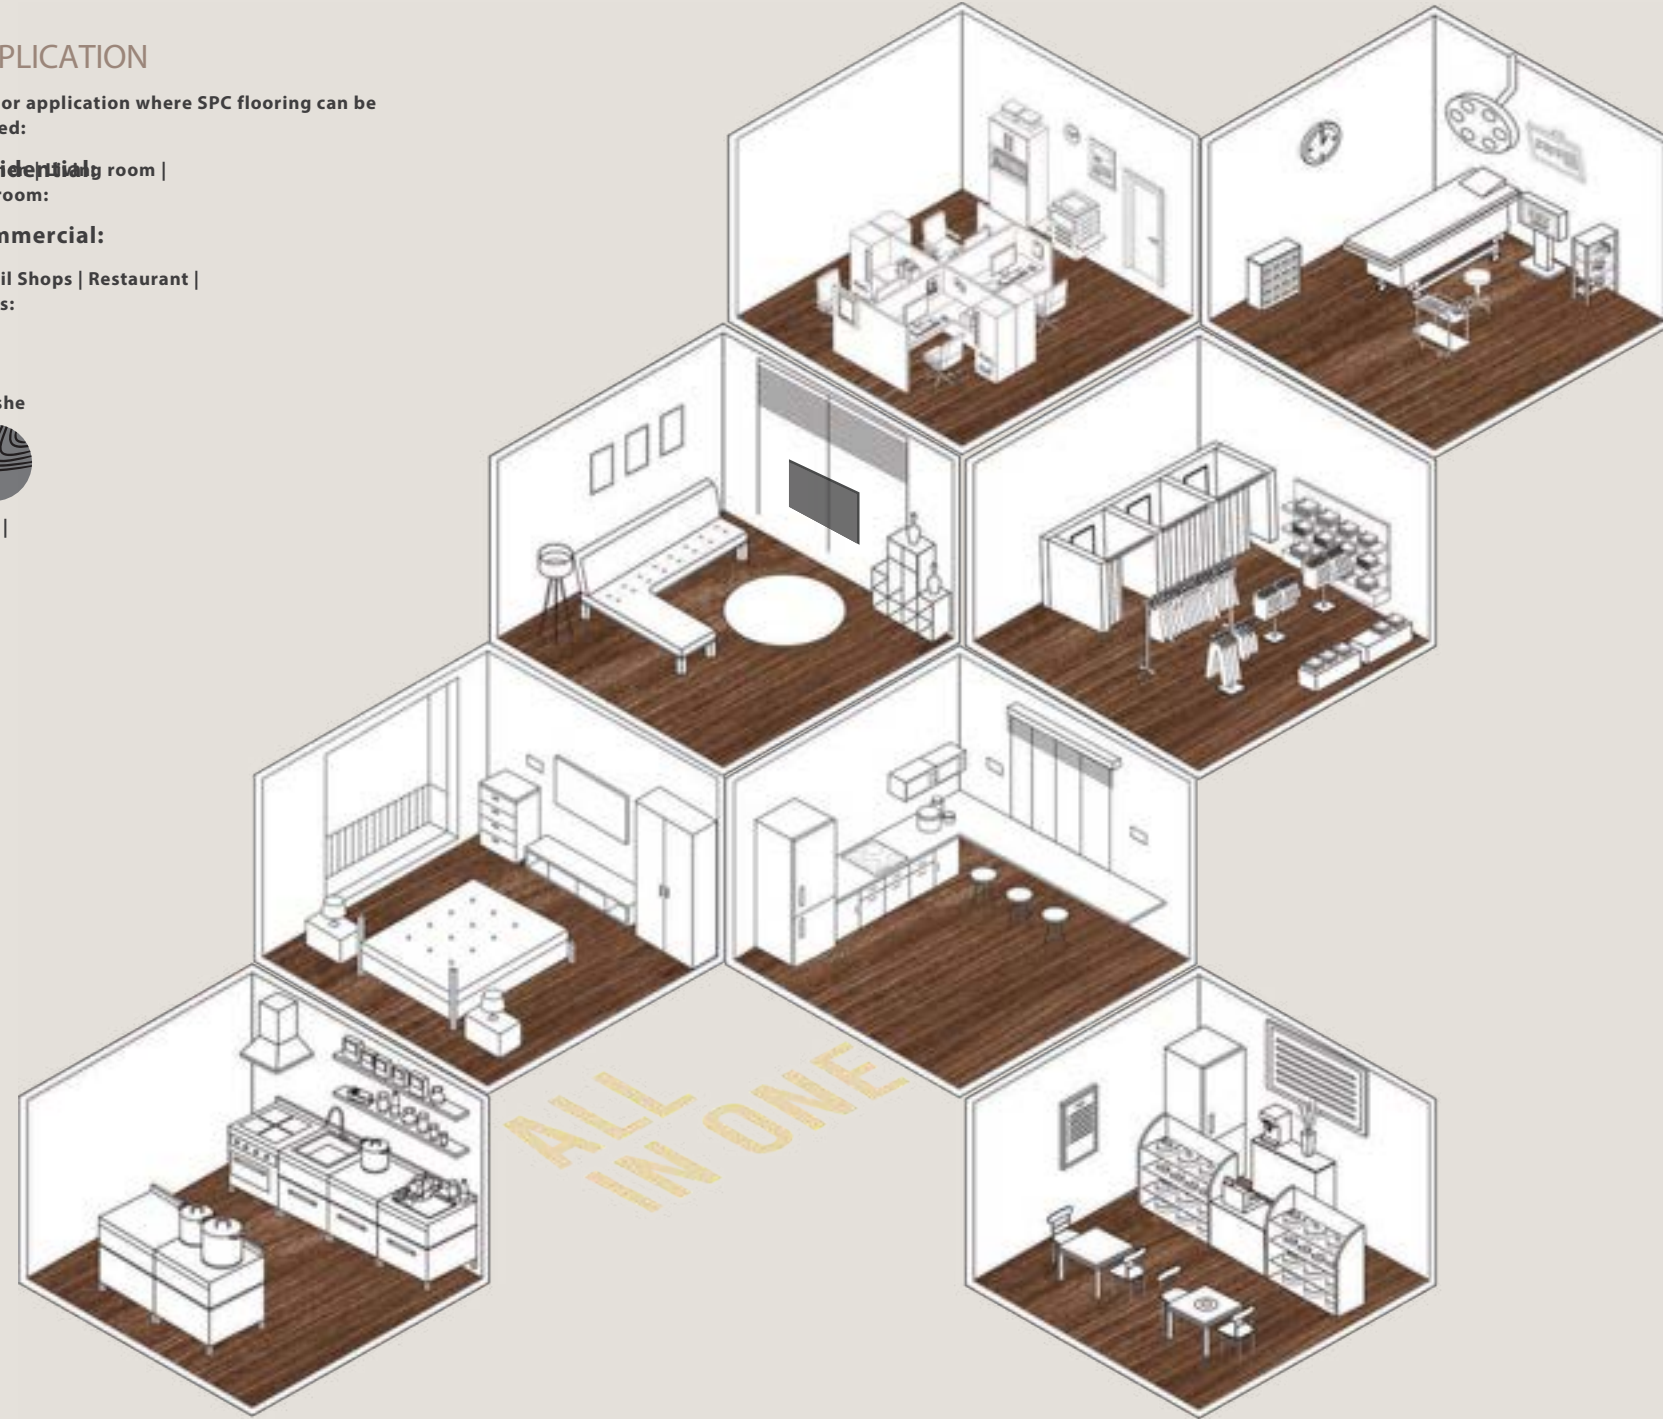

Our environmental commitment starts right from the design stage. The surface’s optimal properties in terms of product durability and minimal maintenance, are combined with a firm commitment to minimising its environmental impact throughout the product life cycle: from manufacturing, transportation and installation, through to end of life.

“LINKLOCK” INDEX

SPC
FLOORING

201 X 1220 mm	181 X 1220 mm	306 X 612 mm
1 4	2 8	5 2

201 X 1220 MM



WOODS

Eco-friendly, resistant and
long-lasting flooring.





2114_Antrique Mapel Honey



A touch of Design

Add rustic charm, or a modern flare by adding SPC floors to your living room. Keep your floor looking as great as the day it was installed. You're looking for an easier to maintain option, but still want the classic look. It is a great long-lasting alternative that looks more realistic and stylish – the Touch of Design. It is incredibly versatile. More durable and you can install it at vivid areas.

201 X 1220





Wear layer op♦on: 0.3 & 0.5 MM **Size: 201 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa♦on
method: Uniclic.



2101_Kati Oak Carbon



2102_Kati Oak Coco



Wear layer op♦on: 0.3 & 0.5 MM **Size: 201 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa♦on
method: Uniclic.



2103_Kati Oak Ebony



2104_Kati Oak Grey



2114_Antique Mapel Honey



Wear layer op♦on: 0.3 & 0.5 MM **Size: 201 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa♦on
method: Uniclic.



2105_Alpen Oak Wenge



2106_Alpen Oak Ash



2107_Alpen Oak Dark Grey



2115_Italian Walnut Ebony



2116_Italian Walnut Wenge



2107_Alpen Oak Grey dark





2108_Global Oak
Ash



A touch of Class

Caters sophisticated and dynamic taste with touch of articulated version of SPC flooring in vogue. Maximum expression of modernity in the balance between the inside and outside. The style and class inspire the next architectural surface. Surface can be exploited in the best way, balance and Experience a stark between modern design vintage wisdom.

201 X 1220

WOODS | 201 X 1220 MM | SPC flooring



Wear layer op♦on: 0.3 & 0.5 MM **Size: 201 X 1220**

MM Thickness: 4 MM to 6 MM Edge Profile: Micro

Bevel Edge & Painted Bevel Edges. Installa♦on

method: Uniclic.



2108_Global Oak Ash



2109_Global Oak Ebony



2110_Global Oak Brown



WOODS | 201 X 1220 MM | SPC flooring



Wear layer op♦on: 0.3 & 0.5 MM **Size: 201 X 1220**

MM Thickness: 4 MM to 6 MM Edge Profile: Micro

Bevel Edge & Painted Bevel Edges. Installa♦on

method: Uniclic.



2111_Global Oak Coco



2112_Global Oak Wenge



2113_Global Oak White



2113 - Global Oak White

181 X 1220 MM



WOODS

Eco-friendly, resistant and
long-lasting flooring.





Versatile Essence

For Kitchen Essence, SPC floors are one of the best and trendy options that offer an affordable yet realistic appearance to add to the beauty of the kitchen. SPC are protective to dents, cracking or warping. Kitchen space gains appearance of real wood in particular with unique features of patterns and textures. Seek the majestic, sharp and elegant look with realistic illustration and focused texture. The space comes out beautifully with warmth and character.

181 X 1220



WOODS | 181 X 1220 MM | SPC flooring

Wear layer op♦on: 0.3 & 0.5 MM **Size: 181 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa♦on
method: Uniclic.



1101_walden Oak Ash



1102_Fumed Oak Wenge



WOODS | 181 X 1220 MM | SPC flooring

Wear layer op♦on: 0.3 & 0.5 MM **Size: 181 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa♦on
method: Uniclic.



1103_Pedy Oak Golden



1104_Highland Grey viens



1105_Highland Black viens





Warm and cozy

Your bedroom is your own personal retreat from the world, so it should reflect your unique taste and style.

SPC LINKLOCK flooring features a rustic-industrial design that's both chic and charming at the same time. It features a sturdy, a timeless, an elegant look, suitable for any style of home decor. Show off your bolder side with modern and rustic styles. Give your personal space a comfortable and relaxing environment, allowing you to take a long nap comfortably and reliably.

181 X 1220



Wear layer op♦on: 0.3 & 0.5 MM **Size: 181 X 1220**

MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa♦on
method: Uniclic.



1106_Tudor Oak Rustic grey



1107_Campus Golden Brown



1108_Canyon Oak Ash



1106_Tudor Oak Rustic
grey



Wear layer op◆on: 0.3 & 0.5 MM **Size: 181 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa◆on
method: Uniclic.



1109_Canyon Oak Cherry red



1110_Foster Honey



1111_Denali Oak Ebony



1112_Denali Oak Mahogany



1113_Artician Oak Vintage



MAT
T

V3

FLOOR



Shades of Color

Small commercial places like saloons, shops, gathering halls require ease of movement, minimal maintenance and quick adaptation as key factors. Spaces with Argil wooden planks satisfies them at the highest level. They leave enough scope for decoration with pretty look. Patterns being close to nature suddenly feel relaxed and calm around it. Constraint of limited space gets the best fit of such engineered tiles.

181 X 1220



WOODS | 181 X 1220 MM | SPC flooring



1114_New Castle Honey
zoom



Wear layer op♦on: 0.3 & 0.5 MM **Size: 181 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa♦on
method: Uniclic.



1114_New Castle Honey



1115_New Castle Vintage

WOODS | 181 X 1220 MM | SPC flooring



Wear layer op♦on: 0.3 & 0.5 MM **Size: 181 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa♦on
method: Uniclic.



1116_Creek Oak White



1117_Creek Oak grey




1118_Vertical Oak Black



WOODS | 181 X 1220 MM | SPC flooring



Wear layer op♦on: 0.3 & 0.5 MM **Size: 181 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa♦on
method: Uniclic.

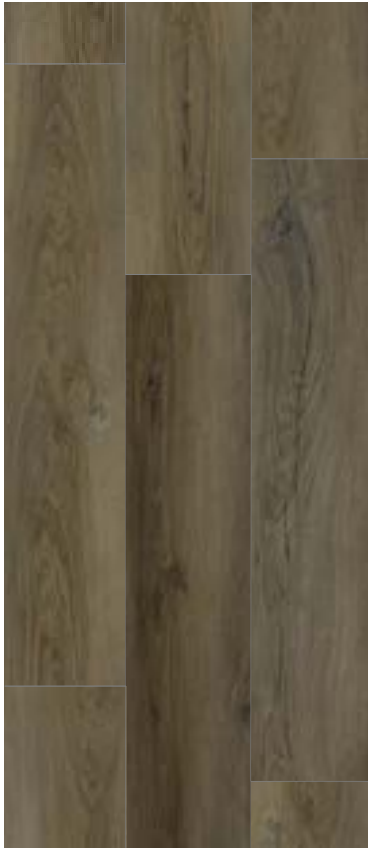

1119_Milano Wenge



1120_Milano Grey



1121_Vertical Oak Blond



1119_Milano Wenge

1122_Lily Oak
Ebony



Luxury to the Space

SPC flooring performs to commercial businesses with the ultimate architectural designs that are both aesthetically pleasing, easy to install and simple to maintain. Select with design one that can handle heavy foot traffic while adopting the overall theme of commercial place or retail store.

It can add an artistic flair to the an elegant building, sophisticated on. Long time durability will also create a more traditional or exotic theme. Bring a sense of sophistication and luxury to the space.

181 X 1220

Wear layer op♦on: 0.3 & 0.5 MM **Size: 181 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa♦on
method: Uniclic.



1122_Lily Oak Ebony



1123_Lily Oak Wenge



1124_Lily Oak Brown



1125_Boston Oak Ebony



1126_Boston Oak White



Wear layer op◆on: 0.3 & 0.5 MM **Size: 181 X 1220**
MM Thickness: 4 MM to 6 MM Edge Profile: Micro
Bevel Edge & Painted Bevel Edges. Installa◆on
method: Uniclic.



1127_Vintage Oak Espresso



1128_Trend Parkett dark Grey



1129_Antique Mapel Golden



1130_Canyon Oak Brown



1131_Trend Parkett Brown



1129_Antique Mapel
Golden

3101_Armani Brown



Sense of Naturalness

The high-tech manufacturing amalgamated with high description scanners and advanced 3D digital imaging have brought out realistic illustrations and created the character, texture and feel that one may expect for any appealing Restaurant.

It is astounding to know that they make the place very righteous and realistic to look at. If one seeks ambience and rough textured yet luxurious feel as majestic, sharp and elegant looking flooring can offer - the must choice is LINK LOCK SPC flooring.

306 X 612



Stone & Marble | 306 X 612 MM | SPC flooring



Wear layer op on: 0.3 & 0.5 MM **Size: 306 X 612 MM**
Thickness: 4 MM to 6 MM Edge Profile: Micro Bevel
Edge & Painted Bevel Edges. Installa on method:
Unidlic.



3101_Armani Brown



3102_Armani Grey



3103_Calacatta Classic






3102_Armani Grey





General

Uniclic is a revolutionary system for installing floors without using glue. The panels can be clicked together simply thanks to the ingenious shape of the tongue and groove. Uniclic is unique because you can install the planks in two different ways:

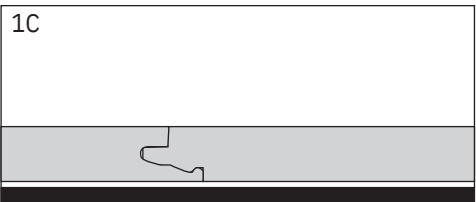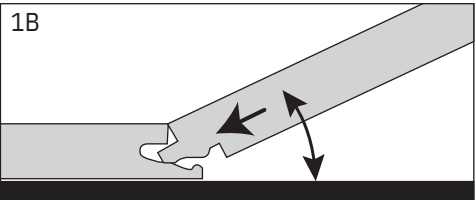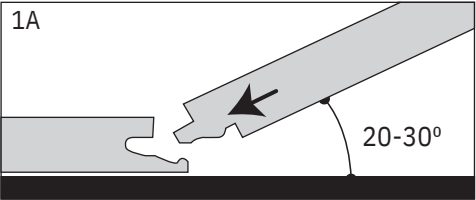

Method A: Position the panel to be installed at an angle of 20 to 30° to the panel already installed. Move the panel gently up and down and at the same time exert forward pressure. The panels will automatically click into place. You can either insert the tongue into the groove, or the groove on to the tongue. The tongue in groove method is the most common and easiest way. See diagram 1A - 1B - 1C.

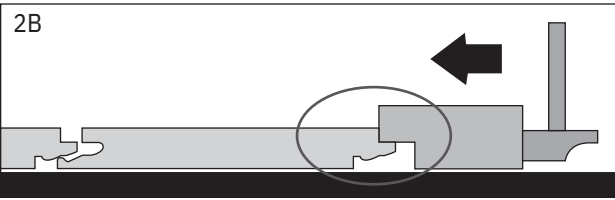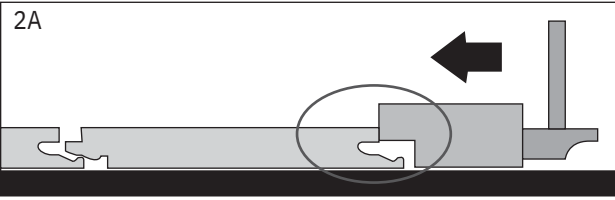

Method B: With Uniclic you can also tap the panels into each other without lining. For this method you must use the special Uniclic tapping block. The planks should not be joined with a single tap. To avoid damaging the panels you must tap them together gradually. See diagram 2A - 2B.

Tools for installing the floor

For the best result, it is essential that you follow the installation instructions exactly. Besides the regular tools for installing floors (i.e. hammer, saw, pencil, measure) you will also need the following accessories:

- installation kit (crowbar, spacers (1-8 mm / 0,039" -0,315") and Uniclic-adapted tapping block)
- underlayment system
- maintenance products


Of course we also need to saw the panels. To obtain a clean cut, the pattern side should face down when you use a jigsaw, sabre saw or circular handsaw and up when you use a handsaw or a crosscut saw.

9 focus points




- Thanks to the Uniclic-system, the floor floats and is installed without glue. You can walk on the floor during and immediately after installation.
- With Uniclic panels you can choose where you want to begin. Think about what will be the easiest way to install the floor. We will demonstrate the installation for right-handed people, from left to right. You can work in the other direction if you want.
- Make sure the panels are mixed sufficiently when you install them, so that you do not end up with too many identical, light or dark panels next to each other.
- Check all panels in daylight before and during installation. Defective panels must never be used.
- The floor should preferably be installed parallel to how the light enters the room. The ideal conditions are 14-20°C (59-68°F) at a relative humidity of 50-60%.
- Let the planks acclimatize for 48 hours in the unopened packaging at the normal room temperature, in the middle of the room where the floor is to be installed.
- Room humidity can vary according to the season, so it is vital that the floor is able to expand and contract. For this reason, make sure you leave an expansion joint of minimum 8 to 10 mm (5/16" to 3/8") on all sides of the floor, around pipes, thresholds and under doors.
- Large rooms must have expansion joints every 13 m (40 feet) width-wise to the panels and every 13 m (40 feet) length-wise. It is recommended to provide an expansion joint between different rooms (e.g. under the door). Expansion joints can be finished by means of a molding that is attached to the subfloor.
- Ensure that the end joints of the panels in two successive rows are never in line. Always ensure that the joints are staggered by at least 15 cm / 6 inches.


Installing the floor

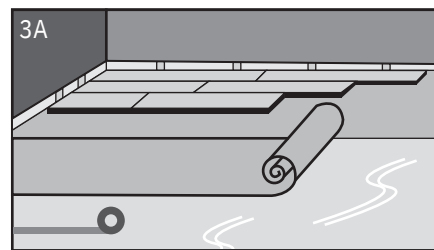


First install the underlayment, per width and gradually as you progress. If the underlayment is pre-mounted on the panels, then you can skip this step. **See diagram 3A.**

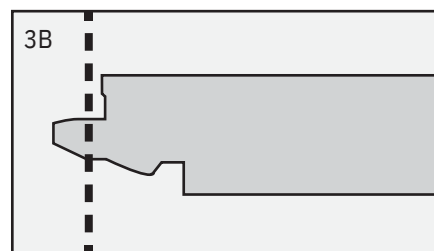


Begin the first row with a whole plank. First saw off the tongue on both the long and the short sides. **See diagram 3B.**

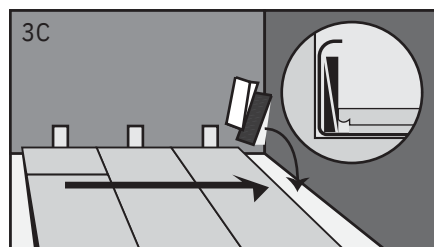

Put the plank with sawn off sides against the walls. Put the spacers from the installation kit between the planks and the wall. This will ensure that your expansion joint is wide enough: 8 to 10 mm (5/16" to 3/8"). **See diagram 3B.**

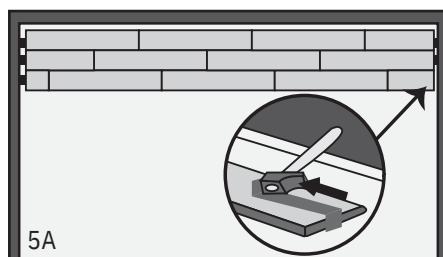


In places where it is too difficult to install the Uniclic planks with the tapping block (e.g. against the wall), you can tap them together using the crowbar and a hammer. **See diagrams 5A - 5B - 5C.**

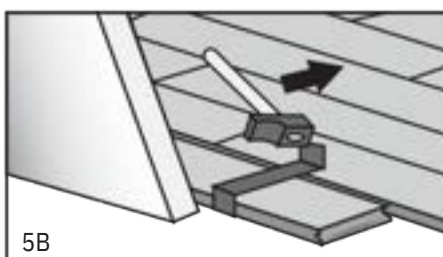



There must also be an 8 to 10 mm (5/16" to 3/8") expansion joint between the last row and the wall. Keep this in mind when sawing the last row of panels.




Pipes

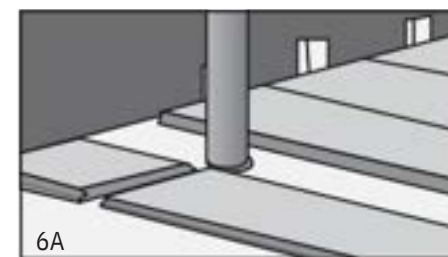


In rows where there is a pipe, make sure the pipe falls exactly in line with the short side of two panels. Take a drill bit with the same diameter as the pipe plus 20 mm (3/4") for the expansion. Click the panels together on the short side and drill a hole centered on the joint between the two panels. Now you can install the panels in the floor. **See diagrams 6A - 6B - 6C.**

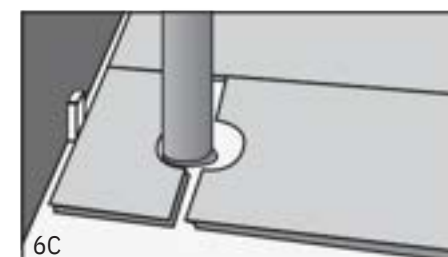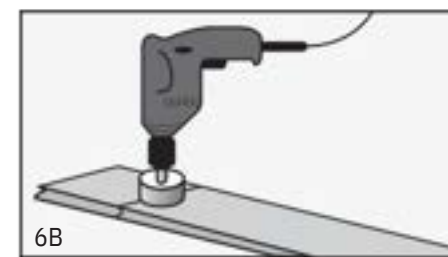


Under door frames

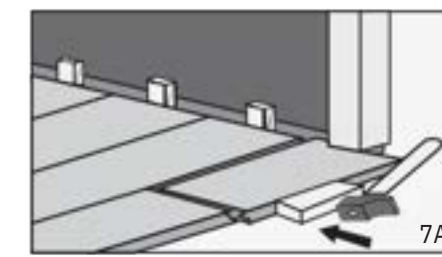

When sawing the panels ensure that the expansion joint under the door is at least 10 mm (3/8"). If you cannot line the panel, use an adapted tapping block or crowbar and hammer to tap the panels together with the planks that are flat on the floor. **See diagrams 7A - 7B.**

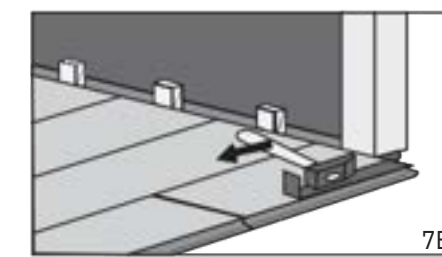

Finishing - Remove all spacers. - Install the molding on the plastic membrane that runs up the wall from under the floor. Never attach the molding to the floor. This method allows the floor to expand and contract under the molding. - For a perfect finish around pipes, use rosettes or caulking. - In places where profiles or skirting cannot be placed, fill the expansion gaps with caulking. **See diagram 8A.**

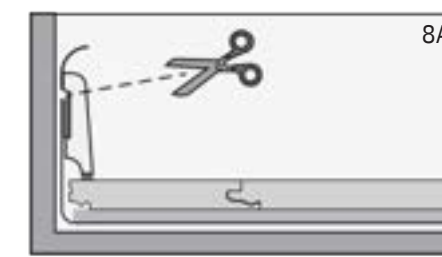

Enjoy your floor.

NOTES

Handwriting practice lines consisting of 20 horizontal dashed lines.





LINK LOCK

Revolution in tiles

210 Bristol Pike, Bristol, PA 19007
www.chestainc.com
sales@chestainc.com
267 245 1180